




HNC328G2-VBZ

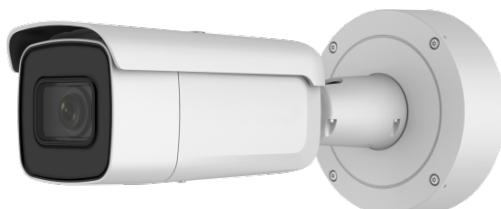

FEATURES

8MP WDR VF Motorized Zoom Bullet, Exterior

- 8Megapixel High Resolution
- Full HD 1080p Video Output
- Low Illumination
- Support H.265
- IP67 Rating
- IR Range: up to 190ft
- True Day / Night
- Motorized Zoom

Specifications	
Model Number	HNC328G2-VBZ
Image Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	Varifocal lens, motorized lens, 2.8 to 12 mm
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Wide dynamic range	120dB
Video compression	Main stream: H.265/H.264/H.264+/H.265+ Sub-stream: H.265/H.264/MJPEG
Max. Image Resolution	3840 x 2160
Frame rate	60 Hz: 20 fps (3840 × 2160) 30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)

Specifications	
Audio	1/1
BLC	Yes, zone configurable
Network storage	NAS
Alarm	1/1
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
Interoperability	ONVIF, PSIA, CGI
Security	User Authentication, reset button, flickerless, dual stream, heartbeat, mirror, watermark
Communication interface	1 RJ45 10M/ 100 M Ethernet interface
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC +/- 25%, PoE (802.3af)
Power consumption	Max, 17.5W
Protection Level	IP67, IK10
IR range	UP to 190ft
Dimension	308.5 mm × 97.9 mm × 93 mm (12.2" × 3.9" × 3.7")
Weight	1385 g (3.1 lb.)
Electrical Box	Included
Pole,Corner	P:HTH-275ZJ,C:HTH-276ZJ