



Improving Indoor Security


Visualint™ 2MP IP Mini Dome Indoor Camera with Starlight + Virtual Technician

Using intelligent analytics to track distinct objects, this 2MP mini dome camera was designed for any small to medium-sized room. Starlight technology helps you see clearly even in the dark, plus, it integrates easily into popular systems so you can control it from anywhere.



VI-M-1250-VT

Key Features

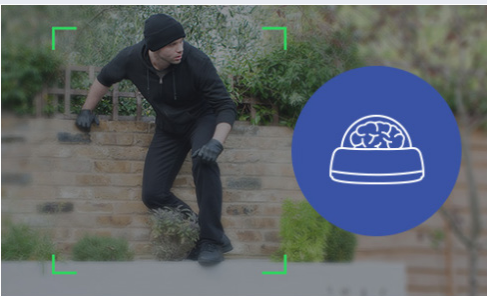

Embedded Intelligent Analytics



Professional Video Monitoring




Enhanced Control & Integration


Without Starlight



With Starlight

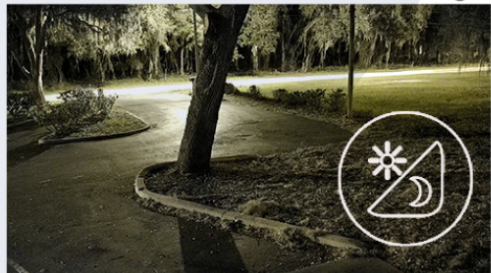

Starlight Low-Light Color Sensor

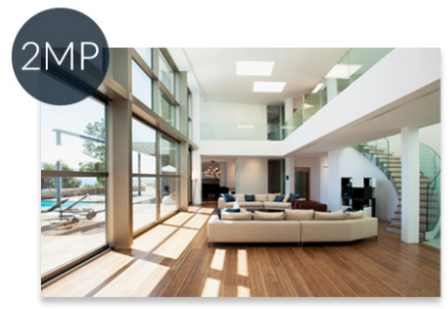


Widescreen & High Definition

Product Details

Technical Specs & Features	VI-M-1250-VT
Audio Inputs / Outputs	1-ch, Built-In Mic / 1-ch
Image Sensor	2MP 1/2.8" Starlight CMOS
Maximum Record Resolution	1920 × 1080
Lens	2.8mm, F1.2
Est. Horizontal Viewing Angle	113.5°
Minimum Illumination	Color: 0.002Lux (F1.2,AGC ON) Black&White: 0.001Lux (F1.2,AGC ON) 0 Lux with IR
Motion Detection	No
Remote Monitoring Integration	Immix
Recording Trigger	No
Full Screen Monitoring	Yes
Image Snapshot	Yes
Audio Support	1-ch, G.711A/G.711U/ADPCM/AAC
Triggered Action Desc.	Email, HTTP Notification, FTP
SD Card Support	Micro SD Card Slot, up to 128GB
Network / Ethernet Desc.	10M/100M Ethernet Interface
Supported Network Protocols	TCP, UDP, HTTP, MULTICAST, UPnP, DHCP, PPPoE, DDNS, NFS, FTP, NTP, RTP, RTSP, IPv6, SNMP, SMTP
Power Consumption	DC12 V, PoE (802.3af) 5W (IR OFF) 8W (IR ON)
Color	Two-tone White & Black
Dimensions (W x H x D)	4.5" x 2.3" x 4.5"
Weather Rating	Indoor Only
Certifications	CE, FCC
Operating Temperature	-20-140°F, 0~95% RHG
Weight	0.8 lb

Multiple Video Streams and Snapshots

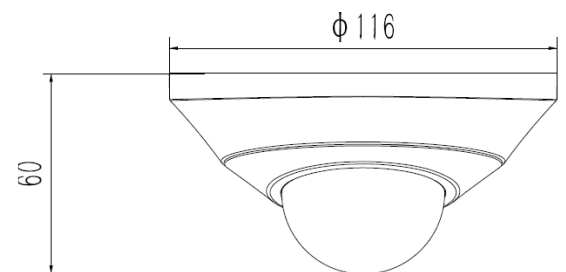

Note: Dimensions are measured in mm.