

Accessory

Cable, Driver, Stand, Bracket, Jack plate





Cable

IMW-15/20/30 Wire



- Extended Cable for IM/IMS-300 and Microphone connection
- D-SUB 15P MALE
- 15m, 20m, 30m each

MW-3200/3300 Wire



- SHIELD LINE for AUDIO
- Circuit of 2CORE
- BALANCED circuit available
- Number of core wires :
 - MW-3200 – 20 core wires
 - MW-3300 – 60 core wires

SW-2200/2300 Wire



- Exclusive lead core line for speaker of sound system
- SW-2200(1.01mm), SW-2300(1.3mm)
- Number of core sires :
 - SW-2200 – 30 core wires
 - SW-2300 – 50 core wires
- Distinguishable by transparent cover.

Speaker Driver

DU-100 Speaker Driver



- Rated Input : 100W
- Impedance : 8Ω
- SPL: 113dB
- Weight : 3.5kg
- Dimensions : 117Ø x 102 mm

DU-30T Speaker Driver



- Rated Input : 30W
- Impedance : 8Ω/330Ω/660Ω
- SPL: 110dB
- Weight : 1.55kg
- Dimensions : 114Ø x 120 mm

DU-40T Speaker Driver



- Rated Input : 40W
- Impedance : 8Ω/250Ω/500Ω
- SPL: 110dB
- Weight : 1.75kg
- Dimensions : 114Ø x 120 mm

DU-50 Speaker Driver



- Rated Input : 50W
- Impedance : 8Ω
- SPL: 113dB
- Weight : 2kg
- Dimensions : 120Ø x 90 mm

DU-75 Speaker Driver




- Rated Input : 75W
- Impedance : 8Ω
- SPL: 114dB
- Weight : 2.65kg
- Dimensions : 120Ø x 92 mm

ETC

M-16


Option Card



- Extended APT-60/120/200
- Maximum of 3 sheets can be added additionally per a model
- Selection of the output place using DIP Switch

M-32


Option Card



- Suitable for covering the blank space in a Rack
- Heat flow space
- Dimensions : 482(W) x 88(H) x 28(D)mm

ATT-03/30/BOX

Attenuator



- Four-step level control
- Switch-plate-mounted attenuator unit
- Attractive, modern design
- Simple installation
- Screwless terminal block for easy installing
- Steel box for ATT-03 / 30 (Attenuator Box)

VCA-100

Wall Volume Controller



- Internal volume : 10kΩ B Curve 2 volume
- Weight : 71g
- Dimensions : 69,8(W) x 114,3(H) x 33(D)mm

DLC-100

Digilink Converter



- Convert Digi-link remote signal to RS-232C remote signal
- Weight : 200g
- Dimensions : 50(W) x 78,5(H) x 29,5(D)mm

MJ-01

MIC Jack Box



- Connection Box for floor or wall installation of microphone connector

PAM-MPM4


CD MP3 Tuner Module



- Module for PAM SERIES installation
- Correspondence of MP3/WMA
- Installation and desorption of USB and Tuner
- CD Long-Life function
- CD MP3 COPY function
- USB Hosting function
- Availability of 40-Memory of TUNER

PAM-WM


Wireless Receiver Module



- Top-class receiving sensitivity using diversity technology
- Application of Tone, Noise Mute circuit to minimize interference
- Signs displayed on Backlight LCD
- Usable Microphone :
WH-A91L(Hand-Held)
WB-A91L(Belt-Pack)

VF-01N

Voice File



- Uploading of wanted soundtracks are available by connecting USB cable and PC
- Possibility of selecting soundtracks (Multi-language supplement)
- Repeat the soundtrack of wanted times (1/2/4/8/16 times)
- Adjustment of volume of the soundtracks



Stand

AFS-3

Mic Stand



- I-type Microphone Stand

BS-4

Mic Stand



- I-type Microphone Stand

FS-3

Mic Stand



- T-type Microphone Stand

RM-01BS

Remote Microphone



- Heavy diecast-zinc construction base
- Mic On/Off Switch
- Remote Chime Switch
- Top mounted XLR connector accepts goose neck microphone such as RMC-01

TS-1

MIC Stand



- Quadrangle Table Type Stand

TSG-1

MIC Stand



- Constant color using special coating method

TSS-1

MIC Stand



- Constant color using special coating method

Bracket

FSB-3

Speaker Bracket



- Weight : 135g
- Dimensions : 84(W) x 84(H) x 92,4(D)mm

SB-1/2


Speaker Bracket



- Weight : 1.3kg
- Dimensions : 374(D)mm

SB-30HA

Speaker Bracket

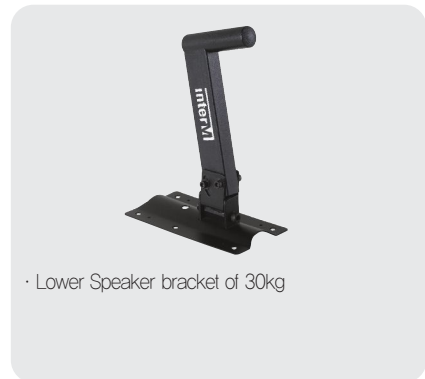

- Lower Speaker bracket of 30kg

MSB-80/100/120

Speaker Bracket




- Application Type : MS-80/100/130

Jack Plate

ISP-01/02

Jack Plate

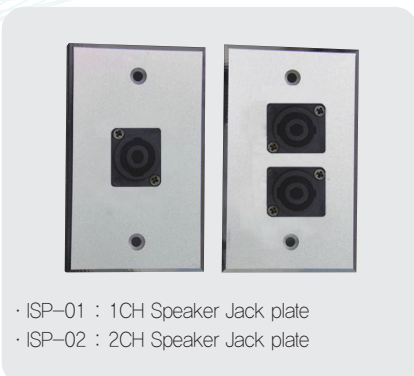

- ISP-01 : 1CH Speaker Jack plate
- ISP-02 : 2CH Speaker Jack plate

IMP-01/02

Jack Plate



- IMP-01 : 1CH Microphone Jack plate
- IMP-02 : 2CH Microphone Jack plate



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com