
RT6-CL2

The **RT6-CL2** is a table edge version of the RT6-R2 table box. It incorporates a tool-less, quick-use clamp to attach to any table or counter edge (with thicknesses ranging from ½" to 1%"). The RT6-CL2 has spacing for any two T6 series large brackets mounted horizontally next to each other to suit your individual applications. It can hold 8 retractors (use RT6-R-LB-RTMKT Mounting Kits), or be configured to hold 4 TBRT cable retractors and still have space for AC and USB chargers as well.

T6 LARGE BRACKET OR TBRT CABLE RETRACTOR (SOLD SEPARATELY) 3.56 0. TABLE EDGE Provided with one T6-LB-UN Universal Bracket 0 0 Available in Black (-BLK) or White (-WHT) 9.72 10.88 1.61 1.13 00000000 0000000 4.75 0 ٠. 6 TABLE 0 **THICKNESS** 5/8" MIN -1-5/8" MAX CABLE / WIRING EXIT AREA

RT6 BRACKET ASSEMBLIES

The **T6-LB-XXXXX** series of inserts (ordered separately) can be used in both the T6 and the RT6 Series boxes and are now offered with 3 AC connections, or 2 AC and 2 USB chargers, or 1 AC and 4 USB chargers.

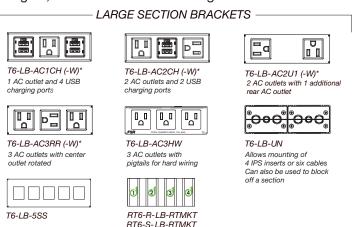

Mounting kits for using up to four

FSR TBRT retractors in "R" or "S style boxes. See LIT1497 TBRT

Retractor Spec for details

* (-W) indicates models that are available in white. Otherwise, brackets are black. Drawings are for illustrative purposes and are not to scale

AC outlet and charger ratings:

Input Rating: 125 VAC 15A 60Hz

Outlet Output Rating: 15 Amps maximum total current draw, each outlet is also individually rated for 15 Amps

USB Charger Output Rating:

T6-LB-AC2CH: 2 x 12 Watt

Space for up to 5 FSR

Simple Solutions connectors


T6-LB-AC1CH: 2 x 10 Watt (upper USB ports), 2 x 5 Watt (lower USB ports)

The **RT6-HLB-4MOM** bracket provides 4 lighted momentary switches so these boxes can be used to activate control systems or can be integrated with FSR's HuddleVU line of collaboration solutions. A half blank is provided with each insert.



RT6-HLB-4MOM

The **T6-LB-UN** (provided with each RT6)



Allows mounting of four IPS inserts or six cables. Can also be used to block off a section.

Remove knockouts for cable pull use.

FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424 Phone: 973.785.4347 · Fax: 973.785.4207 Web: www.fsrinc.com · E-mail: sales@fsrinc.com

Specifications are subject to change without notice. © 2016 FSR, Inc. All Rights Reserved

DESCRIPTION

Revolutionizing the integration of AV, IT, and Power — all in the same box

The REVOLUTION Series Table Boxes are available in various shapes to match your needs and designs.

Select square or rectangular boxes, dual rectangular boxes for those larger tables, or a clamp on table unit. A full line of insert brackets and cable retractors are available. The internal brackets are designed to hold AC, USB Chargers, Cable Pulls, Cable Retractors, snap-in Keystone Connectors, and FSR's full line of IPS (Intelligent Plate Solutions).

The REVOLUTION Table Boxes are available in a black, silver and white powder coated finish for maximum durability.

(See ordering information to determine available color by model number.)

All models are shipped with a T6-LB-UN universal bracket(s). Each bracket allows mounting of four IPS, six cables (in a "pull" configuration) or can be used to simply block a section of the table box.

RETRACTOR READY

FSR's TBRT Cable Retractors balance form and function, making tangle-free cable management an easy task. This cable management system offers convenience as well as cable storage and protection, hiding unsightly cables when not in use. The cables can be quickly deployed by the user and extend to any length, up to four feet. A simple pull and release of the extended cable is all that is needed to return the cable to the protective reel. No button release is required.

The TBRT assemblies can be ordered in HDMI (4 color coded cables available for integration with HuddleVU systems), HD-15 (VGA) with fixed 1/8" stereo audio jack, CAT-6, 1/8" Stereo Audio, Display Port ++, Mini Display Port and USB. All cables are of the highest quality and, are tested for longevity. Retractor life is greater than 8,000 cycles.

APPLICATIONS

- Desks
- Lecterns
- Lab Tables
- Huddle Areas
- · Boardroom Tables
- Control Consoles
- Classrooms
- Multipurpose Rooms

FEATURES

- · Choice of shapes and form factors
- Large capacity
- · Low profile
- Uses the full FSR T6 large connector, plate and charger solutions
- · Hideaway Doors
- Boxes can be used with FSR's HuddleVU Collaboration systems with the addition of RT6-HLB-4MOM Brackets which provide four momentary switches and LEDs.
- Provided with one or more T6-LB-UN Brackets dependent on RT6 model
 - * For Round Box Solutions see (LIT1291) T6 Table Box family spec sheet.



This symbol indicates the device is

RETRACTOR Ready

and accepts the number of retractors shown in the circle.

FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424 Phone: 973.785.4347 · Fax: 973.785.4207 Web: www.fsrinc.com · E-mail: sales@fsrinc.com LIT1598C















RT6-S3

The **RT6-S3 Table Box** is a square box with spacing for any three T6 series large brackets mounted vertically to suit your individual applications. It can also hold up to 8 TBRT cable retractors and still have space for AC and USB chargers as well.

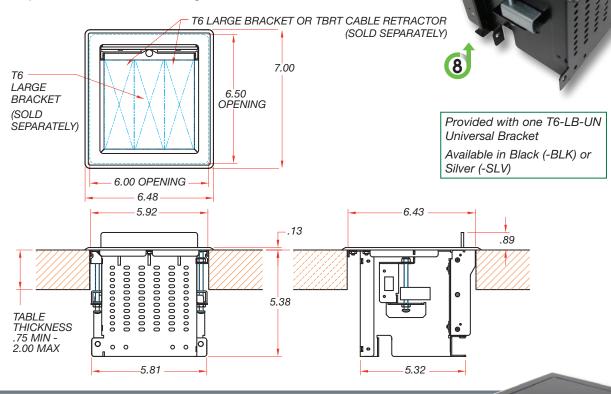


RT6-S4

The **RT6-S4 Table Box** is a square box with spacing for any four T6 series large brackets mounted vertically. It can also hold up to 8 TBRT cable retractors and still have space for AC and USB chargers

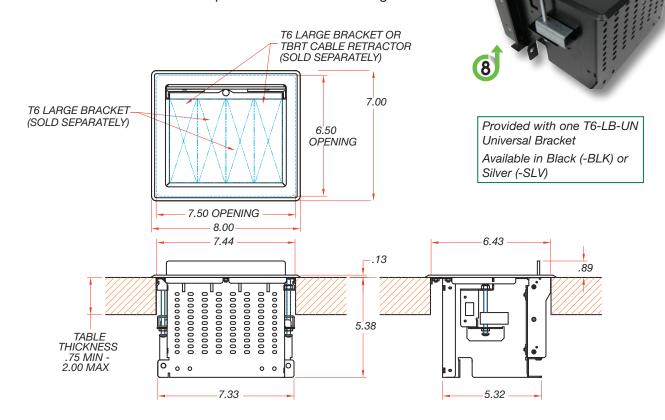

RT6-R2

The **RT6-R2 Table Box** is a rectangular box with T6 series large brackets mounted horizontally to suit your individual applications. It can also be configured to hold 4 or 8 TBRT cable retractors.

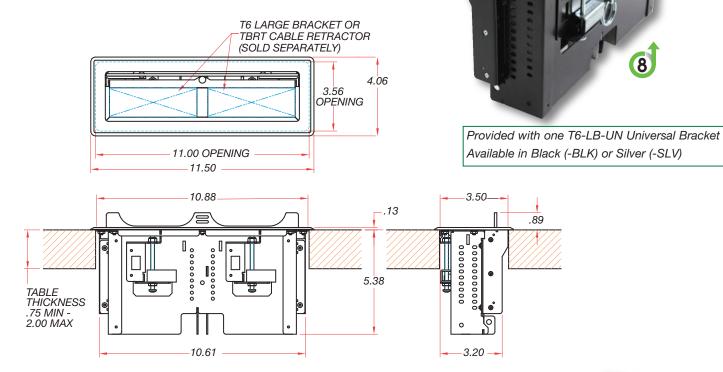

RT6-RD4

The **RT6-RD4 Table Box** is a rectangular box with spacing for any four T6 series large brackets mounted horizontally facing opposite sides of the box. Individual covers for each side handle your individual applications. It can also be configured to hold up to 16 TBRT cable retractors or 8 retractors to still have space for AC and USB chargers as well

