



Residential



Voice & 4G LTE



Multiple users



All carriers

# EZ 4G™

## Five-band Home Cellular Signal Booster

## SureCall EZ 4G

### Five-band Home Cellular Signal Booster

#### Overview

SureCall's EZ 4G is a revolutionary plug and play cell phone signal booster that does not require an outdoor antenna. The attractively designed EZ 4G incorporates SureCall's award-winning, patented all-carrier technology to deliver enhanced indoor cell phone signal coverage for clearer and more reliable voice and data performance.


#### Features and Benefits

- First all-carrier voice and 4G LTE signal booster that doesn't require the installation of a roof-top antenna
- Installation in as little as 15 minutes
- Typically covers 1-2 rooms (up to 2,000 sq. ft.) with weak reception at window where unit is placed (coverage increases with stronger signal)
- Supports multiple users simultaneously
- Backed by industry leading 3 year manufacturer's warranty

#### Booster Kit Includes:

The EZ 4G Kit (SC-PolyEZ-DT-72-Kit) includes: the EZ booster with built-in outdoor antenna, power supply, coax cable and an indoor desktop antenna.

#### Installation Example

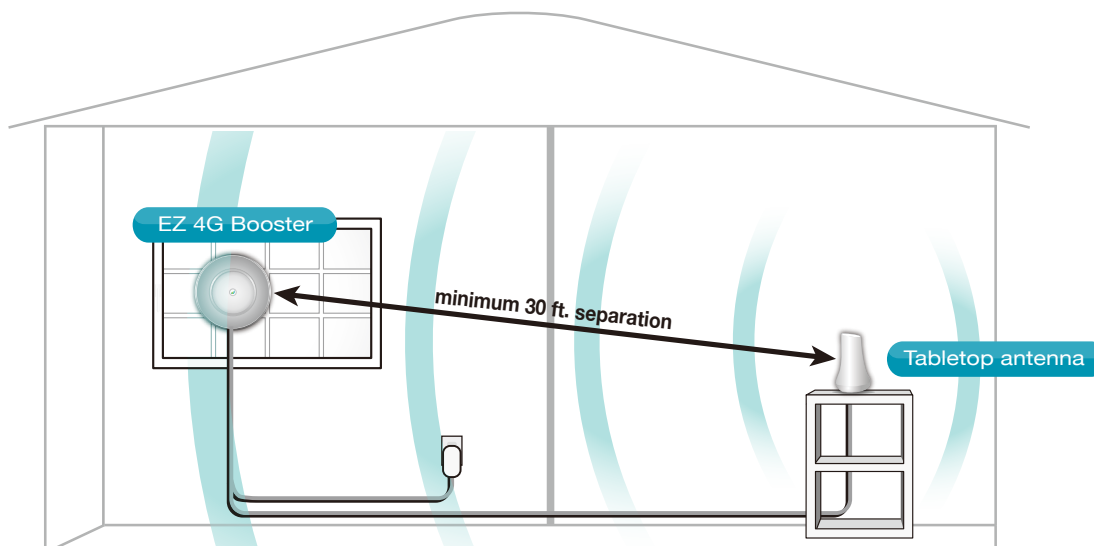

#### Key Features:

- Uplink becomes dormant when not in use, providing green, power saving operation
- Auto Gain Control (AGC) for carrier-friendly operation
- Supports all Voice and 4G LTE standards
- Patent #8,867,572 and patent pending



# EZ 4G™

## Five-band Home Cellular Signal Booster

### Specifications

#### Model No.

Uplink Frequency Range (MHz):

Downlink Frequency Range (MHz):

Supported Standards:

Input/Output Impedance:

Maximum Gain:

Noise Figure:

VSWR:

AC Input:

Maximum Output Power:

Cable:

RF Connectors:

Power Consumption:

Dimensions:

Weight:

Coverage:

#### EZ 4G

698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755

728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155

CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards

50 ohm / 75 ohm

72 dB

7 dB

≤2.0

110V, 50/60 Hz

1 Watt EIRP

RG6 (50 feet)

Donor port: Integral, Server port: F Female

<10W

13 in. Diameter

3 lb. 2 oz.

1-2 Rooms (up to 2,000 sq. ft.)

Specifications are subject to change. Specifications contained within apply only to products meeting the latest FCC Certification Guidelines.