SIGNATURE SERIES25" Depth Premium Audio Video Enclosure

STRONG

SR-AV-CAB-22/32/42U-25IN

Product Overview

Package Contents

- A Top Cover
- B Frame
- C Front Door Glass
- D Side Doors (x2 22U; x4 32/42U)
- E Back Door Solid
- F Lock
- G Adjustable Depth Mounting Rails
- H Casters (x4)
- I Leveling Feet (x4)
- J Front Door Hinges

Not Pictured:

- Allen Keys (x1)
- Door Keys (x4)
- Side Panel Keys (x4)
- 10-32 Rack Screws (x40)

Key Features

- · Fully welded and assembled
- 2200 lb. Max load (w/ leveling feet)
- Side Panels: 16-gauge single sheet metal
- Rails & Frame: 14-gauge single sheet metal
- 10-32 Threaded rails for faster component loading
- EIA 310-D Hole Pattern
- Grounding and bonding in multiple locations.
- · Lifetime limited warranty

Note: Check with local authorities in regard to code requirements for compliance.


Reversing Front Door

Tools Required:

- · 5mm Allen Key (Included)
- #2 Philips Head Screw Driver

Reversal Steps

- 1. Disconnect ground strap inside door.
- Remove door by lifting hinge pins and set aside.
- 3. Remove hinges using screwdriver. Install on opposite side of cabinet.
- 4. Remove lock, flip over and reinstall.
- 5. Place door onto cabinet ensuring that both pins are securely attached in hinge, and reattach ground strap to door.

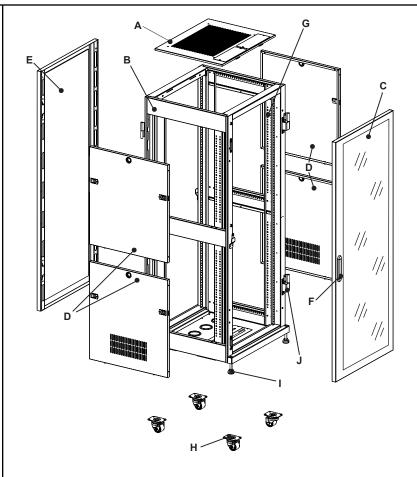

Rails accept 10-32 rack screws (40 included). Additional screws are available in a no-roll jar that includes 200 screws and nylon washers. (SR-SCREWS-200JAR)



To ground cabinet, connect the ground wire to the field wiring ground terminal on the bottom panel first. To ground side panels and top, use UL Listed closed loop connectors with minimum 12 AWG wire 1/4" zinc plated steel or stainless steel internal tooth washer, and an M6 nut to connect to the doors or side rails in locations N&O above.





CAUTION!

When loading equipment into cabinet, ensure that leveling feet are adjusted correctly and load heavier equipment at the bottom of the rack.


*Note: Equipment cabinets are intended to house or mount certified equipment that is provided with its own fire and electrical enclosure.

SIGNATURE SERIES25" Depth Premium Audio Video Enclosure



SR-AV-CAB-22/32/42U-25IN

Dimensions

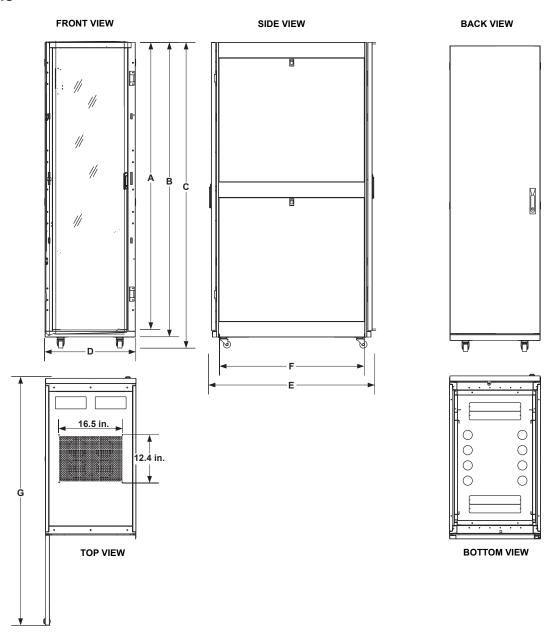

Product	A-Racking Height	B-Height (Overall)	C-Height (With Casters)	D-Width (Overall)	E-Depth (Overall)	F-Usable depth	G-Depth (Door Open)
SR-AV-CAB-42U-25IN	42U	77"	79.4"	23.5"	25"	22.25"	47.9"
SR-AV-CAB-32U-25IN	32U	60"	61.9"	23.5"	25"	22.25"	47.9"
SR-AV-CAB-22U-25IN	22U	42"	44.4"	23.5"	25"	22.25"	47.9"



Warranty & Regulatory

Find details of this product's Lifetime Limited Warranty at **snapav.com/warranty**, or request a paper copy from Customer Service at (866) 424-4489. Find other legal resources, such as regulatory notices and patent information, at **snapav.com/legal**.

For Technical Support: 1.866.838.5052