





Table of Contents

Introduction	4 - 5
Imagine the Possibilities	6 - 7
Tabletop Touch Screens	8 - 11
In-Wall Touch Screens	12 - 15
Handheld Remotes	16 - 19
System Controllers	20 - 25
URC Lighting	26 - 29
Inspiration Gallery	30 - 31
High-Definition Audio (HDA)	32 - 39
Architectural Speakers	40 - 43
Mobile App	44 - 45
Sensors	46 - 47
Integration Partners	48 - 49
Dealer Resources	50 - 51
Programming Software	52 - 53
About URC	54 - 55





Superior, Reliable, Scalable Automation

URC's Total Control system delivers next generation, <u>residential and commercial</u> automation solutions and exceptional performance for a truly personalized experience. Imagine your smart home or office exceeding your expectations.

Leverage the power of URC's integrated automation solutions.

- Ease of programming, custom macro creation and UI customization
- Intuitive end-user operation
- Software solutions for residential and commercial applications
- No licensing fees free off-site programming, monitoring and control using URC's mobile apps
- Ability to create custom system drivers (IR, RS-232 and IP)
- URC's High-Definition Audio (HDA) with numerous advanced features like built-in DSP and 70V audio distribution
- Extensive library of two-way modules and drivers including DSP, lighting, HVAC, access control, conferencing, camera and more
- One-day Total Control Level 1 Certification programming course and two-day, Level 2 Certification courses available
- Award-winning technical support and field engineers
- Reliable, expert field support to help dealers
- GSA Certified and TAA compliant

Think Beyond Everyday... with unique features and experiences available only through Total Control.



Imagine the Possibilities

URC's Total Control system combines industry-leading technology with bold design and single touch or voice activation. Seamlessly command your residential or commercial space from a single control device. *Control Seamlessly. Manage Efficiently. Engage Meaningfully.*



Integrated Entertainment

Control video throughout family spaces, offices, fitness areas, outdoor environments, amenity spaces, bars, restaurants and more.



High-Definition Audio

Stream premium quality music or make announcements with ducking and no echo or delay.



Smart Lighting

Automate smart lighting solutions for convenience, energy savings, safety and security.



Reliable Comfort

Automate and control temperature from a single device.



Automated Shades

Save energy and offer convenience with automated shade integration.




Remote Monitoring and Programming

Alerts, notifications and system updates for facility owners and managers.



Smart Security

View live video of exterior and interior spaces on URC touch screens, remotes or mobile app.

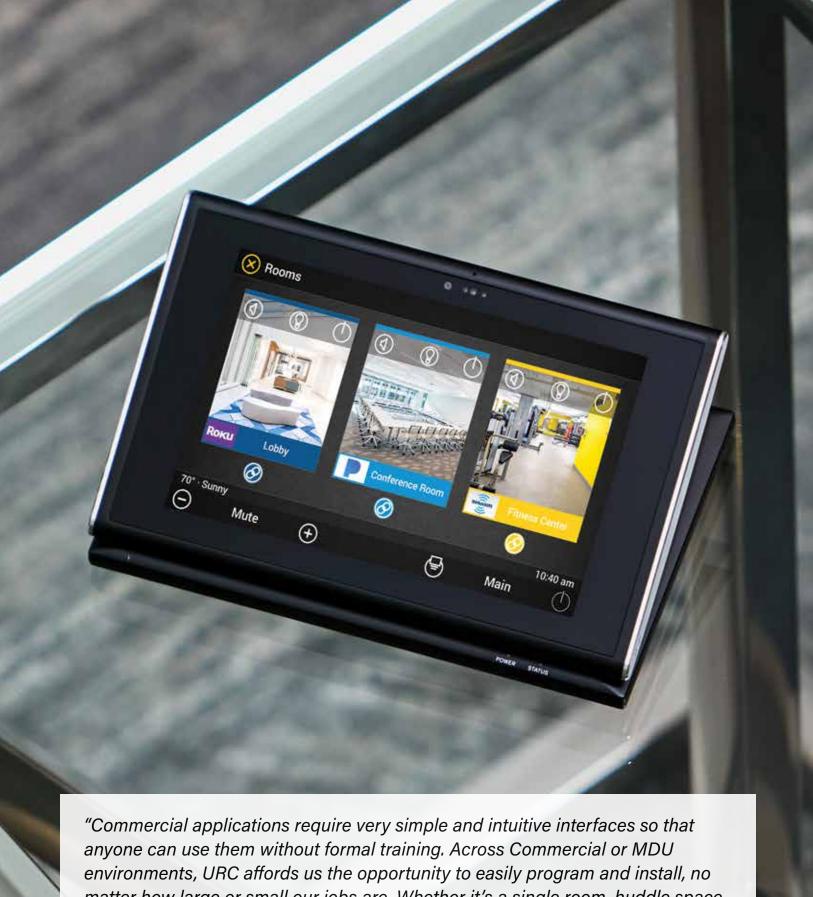

matter how large or small our jobs are. Whether it's a single room, huddle space or a large building, we can do it all using a URC processor with Total Control."

- John Carroll, Nard's Inc.

Tabletop Touch Screens





TDC-9100 10" Tabletop Touch Screen Controller

This premium tabletop controller features a 10" high-resolution touch screen and charging base. Ideal for main rooms of the house and conference rooms, the brilliant LCD displays vivid images of the attractive graphic user interface and Favorite Channels icons – plus live video from door stations and surveillance cameras. The built-in A/V intercom offers a convenient room-to-room and doorbell communication with live video. It is perfect for high-end residential and commercial installations and can be powered by Wi-Fi or wired (PoE) network. Easy voice control with Apple TV or Comcast Xfinity.





TDC-7100 7" Tabletop Touch Screen Controller

Ideal for family rooms, kitchens, bedrooms, and smaller commercial spaces such as huddle rooms, this premium tabletop controller features a 7" high-resolution touch screen and inductive charging base. The brilliant LCD displays vivid images of the attractive graphic user interface, Favorite Channels icons, QWERTY keyboard pop-up for Roku plus live video for room-to-room intercom, door stations, and surveillance cameras. Easy voice control with Apple TV or Comcast Xfinity.





TDC-5100 5" Handheld Touch Screen Controller

This premium handheld controller presents a streamlined design with both a touch screen and hard buttons for optimal hand feel and functionality. The hard buttons deliver the convenience of control without having to look at the screen. When separated from the charging base, the keypad features back-side finger grips to complete a perfect fit. The vibrant 5-inch color LCD screen delivers high-resolution graphics and ease of use. With enhanced processing speed, the TDC-5100 enables quick response to simple one-touch or voice commands, and the built-in mic and speaker communicate seamlessly via Amazon Alexa, Comcast Xfinity or Apple TV. Proximity, ambient light and pickup sensors wake the device and ensure a premium user experience. Compatible with all current URC Total Control integrations, the TDC-5100 is able to control an entire residential or commercial URC system.









SKU	TDC-9100	TDC-7100	TDC-5100
Description	10" Tabletop Touch Screen Controller	7" Tabletop Touch Screen Controller	5" Handheld Touch Screen Controller
Processor/Memory	Cortex-A9 QuadPlus 1 GHz	Cortex-A9 Dual 1 GHz	Flash Memory 8GB
Ethernet Port RJ45	10/100/1000 Mbps	N/A	N/A
Wi-Fi	Quick Connect 2.4 GHz or 5.0 GHz	Quick Connect 2.4 GHz	Quick Connect 2.4 GHz or 5.0 GHz
Voice Control	Apple TV and Comcast Xfinity	Apple TV and Comcast Xfinity	Amazon Alexa, Apple TV and Comcast Xfinity
LCD	10" Capacitive Touch Display	7" Capacitive Touch Display	5" Capacitive Touch Display
Battery Life	3 Days, Normal Usage	3 Days, Normal Usage	3 Days, Normal Usage
Camera	Yes	Yes	Yes
Sensor	Proximity Sensor, Light Sensor, Pickup Sensor	Proximity Sensor, Light Sensor, Pickup Sensor	Proximity Sensor, Light Sensor, Pickup Sensor
Microphone	Yes	Yes	Yes
Speaker	Yes	Yes	Yes
Dimensions	W: 10.16" / 258mm H: 6.95" / 176.5mm D: 4" / 101.6mm	W: 7.91" / 200.9mm H: 5.04" / 128mm D: 2.48" / 62.9mm	W: 8.27" / 210.06mm H: 4.41" / 112.01mm D: 1.28" / 32.51mm
Weight	43.2 oz / 1.23 kg	16.9 oz / 0.48 kg	11.5 oz / 0.33 kg
System	Total Control® Professional Programming Required	Total Control® Professional Programming Required	Total Control® Professional Programming Required
In The Box	TDC-9100, Standard Charging Base, USB-C Charging Cable, Power Adapter, Battery	TDC-7100, Inductive Charging Base, USB-C Charging Cable, Power Adapter, Battery	TDC-5100, Charging Base, USB-C Charging Cable, Power Adapter, Battery
Sold Separately	PoE Switch, PoE Injector	N/A	N/A
UPC	656787-377974	656787-311121	656787-705265
Warranty	http://www.urc-automation.com/warranty		





"The URC system made it easy to control what I need, often with just one press of a button. It also adds a real cool factor to my home."

- Tom, Homeowner in Ohio

In-Wall Touch Screens



TKP-9600 10" In-Wall Touch Screen

Ideal for residential and commercial installations, this sleek in-wall touch screen features a brilliant 10" LCD screen to display vivid images, easy control, fast speeds and live video from door stations and surveillance cameras. The audio video intercom offers convenient room-to-room communication with live video. Install multiple TKP-9600 touch screens in homes, restaurants, and offices for intuitive one-touch system operation. Easy voice control with Apple TV or Comcast Xfinity.



TKP-8600 8" In-Wall Touch Screen with Voice Control

This premium in-wall touch screen features an 8" high-resolution screen, faster processing speed and a sleek profile. The brilliant LCD displays vivid images of the attractive graphic user interface – plus live video from door stations and surveillance cameras. A built-in microphone provides for easy voice control with Alexa*, Siri** or Xfinity.

- * Varies by location
- ** Apple TV only

VOICE





SKU	TKP-9600	TKP-8600
Description	10" In-Wall Touch Screen Controller	8" In-Wall Touch Screen Controller with Voice Activation
Network/ Ethernet	10/100/1000 Mbps	10/100/1000 Mbps
Voice Control	Apple TV and Comcast Xfinity	Amazon Alexa (varies by location), Apple TV and Comcast Xfinity
LCD	10" Capacitive Touch Display	8" Capacitive Touch Display
Camera	Yes	Yes
Sensor	Proximity Sensor, Light Sensor	Proximity Sensor, Light Sensor
Microphone	Yes	3 Mic Array
Speaker	Yes	2x 1.5W Stereo
Dimensions	W: 10.25" / 260.4mm H: 7" / 177.8mm D: 1.25" / 31.75mm	W: 8.14" / 206.8mm H: 5.91" / 150mm D: 1.04" / 26.5mm
Weight	24 oz / 680.4g	15.52 oz / 440g
System	Total Control® Professional Programming Required	Total Control® Professional Programming Required
In The Box	TKP-9600, Mounting Ring, 4 Mounting Screws, 4 Spacers, 2 Ribbon Spacers	TKP-8600, Mounting Ring, 4 Mounting Screws, 4 Spacers, 2 Ribbon Spacers
Sold Separately	PoE Switch, PoE Injector	PoE Switch, PoE Injector, Flush Mount Kit
UPC	656787-377967	656787-701526
Camera Sensor Microphone Speaker Dimensions Weight System In The Box Sold Separately	Yes Proximity Sensor, Light Sensor Yes Yes W: 10.25" / 260.4mm H: 7" / 177.8mm D: 1.25" / 31.75mm 24 oz / 680.4g Total Control® Professional Programming Required TKP-9600, Mounting Ring, 4 Mounting Screws, 4 Spacers, 2 Ribbon Spacers PoE Switch, PoE Injector	Yes Proximity Sensor, Light Sensor 3 Mic Array 2x 1.5W Stereo W: 8.14" / 206.8mm H: 5.91" / 150mm D: 1.04" / 26.5mm 15.52 oz / 440g Total Control® Professional Programming Required TKP-8600, Mounting Ring, 4 Mounting Screws, 4 Spacers, 2 Ribbon Spacers PoE Switch, PoE Injector, Flush Mount Kit

http://www.urc-automation.com/warranty

Warranty



"The URC platform allows Starpower to design a great control solution for our clients. URC offers valuable remote training and education tools to keep our team informed on the latest trends and interface technology."

- David Pidgeon, Starpower



"I have been very pleased with the URC control system. It's great to control everything with one remote."

- Marshall, Homeowner in South Carolina

Handheld Remotes





TRC-1480 Handheld Remote with Voice Control

Designed for residential and commercial applications, this flagship handheld remote provides full control of all connected devices in your entire home or commercial facility – of all TVs, cable boxes, A/V components, music systems, lighting, security cameras, door locks, thermostats, motorized shades, pool/spa heaters and more.

This high-performance remote with ergonomic design delivers two-way control of Total Control and third-party products for the ultimate smart home experience. A built-in microphone provides for easy voice control with Alexa*, Siri** or Xfinity.

- * Varies by location
- ** Apple TV only
- o amazon alexa







TRC-1080 Wi-Fi Handheld Remote

This Wi-Fi handheld remote provides multi-zone control of entertainment and smart home devices. The vivid 2" color LCD screen can be programmed with custom menus, color schemes, icons and has the ability to display IP surveillance cameras.

TRC-820 Wi-Fi Handheld Remote

High-performance Wi-Fi handheld remote offers singleroom control of entertainment and smart home devices. It is professionally programmed with custom menus, color schemes and icons. The vivid 2" color LCD has the ability to display IP surveillance cameras.









SKU	TRC-1480	TRC-1080	TRC-820
Description	Whole House Remote With Voice Control	Whole House Remote	Single Room Remote
Processor/ Memory	ARM Cortex-A35 Core 1.5GHz x 4	ARM9 454 MHz	ARM9 454 MHz
Wi-Fi	2.4 GHz and 5.0 GHz	2.4 GHz	2.4 GHz
LCD	2.4" Capacitive Touch Display	2" LCD Display	2" LCD Display
Battery	Li-Polymer Rechargeable Battery	Li-ion Rechargeable Battery	Li-ion Rechargeable Battery
Battery Charging	3 Hours	5 Hours	5 Hours
Battery Life	4 Days, Normal Usage	4 Days, Normal Usage	4 Days, Normal Usage
Sensor	Pickup Sensor	Pickup Sensor	Pickup Sensor
Microphone	Yes	N/A	N/A
Dimensions	W: 1.97" / 50.8mm H: 9.05" / 229.8mm D: 1.06" / 26.9mm	W: 2.04" / 51.8mm H: 8.46" / 214.9mm D: 1.02" / 25.9mm	W: 2.04" / 51.8mm H: 8.66" / 220mm D: 1.19" / 30.2mm
Weight	7.2 oz / 204.1g	7.8 oz / 221.1g	5.6 oz / 158.7g
System	Total Control® Professional Programming Required	Total Control® Professional Programming Required	Total Control® Professional Programming Required
In The Box	TRC-1480, Charging Cradle, USB-C Cable, Power Adapter, Li-Polymer Rechargeable Battery	TRC-1080, Charging Cradle, Power Adapter, Li-ion Rechargeable Battery	TRC-820, Micro USB Charger, Li-ion Rechargeable Battery
UPC	656787-701502	656787-309401	656787-338203

Warranty

http://www.urc-automation.com/warranty

System Controllers





MRX-30 Premier System Controller

This flagship Total Control processor delivers the best possible automation and control for larger residential and commercial applications. It is based on a powerful quad-core processor and provides instant two-way communication with the family of Total Control products and a wide range of third-party devices and subsystems.







MRX-15 Advanced System Controller

Smaller but powerful, the MRX-15 delivers high performance system processing in a one-rack high space. It delivers flawless automation and control for your residential and commercial applications and provides two-way communication with Total Control products and third-party devices.





MRX-12 Advanced System Controller

URC's latest innovation in controllers of its powerful, flexible Total Control automation system delivers next generation experiences for medium to large residential and commercial installations. The MRX-12 delivers industry-leading integration of automation and control. With a variety of outputs, this controller can scale easily. It is an excellent option for mid-sized residential or commercial installations.



MRX-5 Essential System Controller

The MRX-5 is a high-performance network controller. It is a recommended solution for residential systems of up to 4 rooms. The MRX-5 combines the best of Total Control Accelerator with a high-speed processor in a small chassis that works with the family of URC user interfaces.



MRX-4IR Auxiliary Base Station

This compact auxiliary base station receives commands from the Total Control processor via Wi-Fi or hard-wired (LAN) network and relays them to other devices. This enables seamless integration of wall-mount and ceiling-mount TVs and projectors. It is ideal for installations where CAT5 or a larger base station is not feasible.



MRX-2 Auxiliary Base Station

This auxiliary base station receives commands from the Total Control processor and reissues them via IR, RS-232 or relay. This versatile base station offers advanced connectivity for a broad range of components and provides additional outputs for easy system expansion.









SKU	MRX-30	MRX-15	MRX-12
Description	Premier System Controller	Advanced System Controller	Advanced System Controller
3.5mm IR Emitter Ports	12	8	6
RS-232 Serial Ports (TX, RX, GND)	6	4	2
Relays Configurable to NO, NC, or COM	6	2	1
12-Volt Outputs	4	2	1
Programmable Sensor Ports	6	4	2
Ethernet Port RJ45	100/1000 Mbps	100/1000 Mbps	10/100/1000 Mbps
Rack Size	2U	1U	1U
Dimensions	W: 17" / 431.8mm H: 3.75" / 95.25mm D: 8.5" / 220mm	W: 17" / 431.8mm H: 2" / 51mm D: 8.75" / 222.25mm	W: 17.05" / 433mm H: 1.68" / 42.6mm D: 5.67" / 144mm
Weight	6.2 lbs / 2.8 kg	4.6 lbs / 2 kg	3.02 lbs / 1.37 kg
System	Total Control® Professional Programming Required	Total Control® Professional Programming Required	Total Control® Professional Programming Required
In The Box	MRX-30, Ethernet Cable, 12 IR Emitters with Standard 3.5mm Plugs, AC Power Adapter, Power Cord, Adjustment Tool, Rack Mount Ears	MRX-15, Ethernet Cable, 8 IR Emitters with Standard 3.5mm Plugs, AC Power Adapter, Power Cord, Adjustment Tool, Rack Mount Ears	MRX-12, 6 IR Emitters with Standard 3.5mm Plugs, AC Power Adapter, Power Cord, Adjustment Tool, Rack Mount Ears
UPC	656787-377301	656787-377158	656787-705159
Warranty	http://www.urc-automation.com/warranty		








SKU	MRX-5	MRX-4IR	MRX-2
Description	Essential System Controller	Auxiliary Base Station	Auxiliary Base Station
3.5mm IR Emitter Ports	4	4	6
RS-232 Serial Ports (TX, RX, GND)	1	0	2
Relays Configurable to NO, NC, or COM	0	0	1
12-Volt Outputs	0	0	1
Programmable Sensor Ports	0	0	1
Ethernet Port RJ45	10/100 Mbps	10/100 Mbps	10/100 Mbps
Dimensions	W: 5.12" / 130mm H: 0.98" / 25mm D: 3.98" / 101mm	W: 3.7" / 94mm H: 0.9" / 22.8mm D: 2.8" / 71.1mm	W: 9.8" / 248.9mm H: 1.1" / 27.94mm D: 4.7" / 119.38mm
Weight	6 oz / 0.17 kg	9 oz / 0.26 kg	9 oz / 0.26 kg
System	Total Control® Professional Programming Required	Total Control® Professional Programming Required	Total Control® Professional Programming Required
In The Box	MRX-5, 4 IR Emitters with Standard 3.5mm Plugs, AC Power Adapter, Mounting Plate, 4 Mounting Screws	MRX-4IR, Ethernet Cable, 4 IR Emitters with Standard 3.5mm Plugs, AC Power Adapter, Mounting Plate, 4 Mounting Screws	MRX-2, 6 IR Emitters with Standard 3.5mm Plugs, 12-Volt DC Power Supply, Adjustment Tool, Mounting Plate, 4 Mounting Screws, 2 Meter 3.5mm Stereo to 3.5mm Stereo
UPC	656787-701519	656787-320048	656787-122222

Warranty

http://www.urc-automation.com/warranty

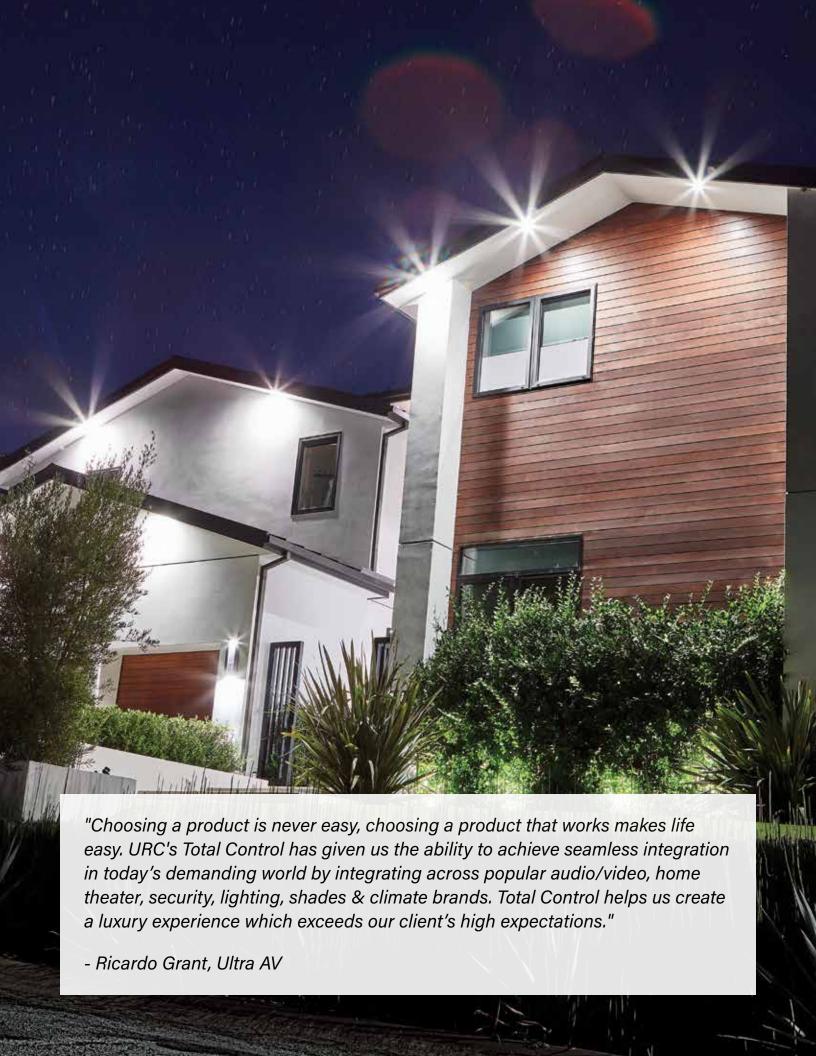

URC Lighting



URC's Single, Configurable Dimmer or Switch

The next generation of smart device control, URC Lighting creates the perfect atmosphere for entertaining or quiet family events with a line of a smart dimmer/switch and networking devices. Seamlessly launch customized experiences with intuitive lighting control and so much more. Imagine...just tap the control button to turn off the lights, turn on the TV, lock the doors, set the temperature and more. URC Lighting devices display notifications for programmed triggers like an open garage door, a triggered window sensor or an approaching delivery. With a simple touch, URC Lighting enables smart control and automation across the Total Control system.





TRF-ZW10 Lighting Gateway Powered by Z-Wave®


The TRF-ZW10 Lighting Gateway powered by Z-Wave® allows reliable control of multiple devices. With faster processing and a fluid user experience, the TRF-ZW10 is an excellent gateway to connect URC Lighting using Total Control.



SKU	LT-3300
Description	URC's Single, Configurable Dimmer or Switch
Color Change	Default Color: White Color Change Kit Available to Change Paddle Color 8 Available Colors
RF Technology	Z-Wave® Plus LR [S2 Encryption]
RF Frequency	908.42 MHz
Z-Wave Chip	800 Series
Power	120 Volt AC / 60Hz
Usage	Indoor, not to be used with Fans or Motors
Installation	Neutral and Non-Neutral Installations
Max Wattage	600W Single-Gang, 500W Double-Gang, 400W Triple-Gang Incandescent. 300W LED (All Installations). 150W CFL (All Installations)
Min Wattage	Neutral Wire: No Minimum Required Non-Neutral: Minimum 40W to 25W depending on light type (LED or CFL)
Dimensions	W: 1.83" / 46.51mm H: 4.13" / 104.78mm D: 1.25" / 31.75mm
Weight	4 oz / 28.34g
System	Total Control® Professional Programming Required
In The Box	LT-3300 Dimmer/Switch
Sold Separately	TRF-ZW10 Required
UPC	656787-705296
Warranty	http://www.urc-automation.com/warranty



21/11	
SKU	TRF-ZW10
Description	Lighting Gateway Powered by Z-Wave®
Color	Black
RF Technology	Z-Wave® Plus [S2 Encryption]
RF Frequency	908.42 MHz
Z-Wave Chip	700 Series
Power	12 Volt DC or PoE
Usage	Indoor
Ethernet Port RJ45	10/100/PoE
Dimensions	W: 3.93" / 100mm H: 1.18" / 30mm D: 3.15" / 80mm
Weight	3 oz / 85.05g
System	Total Control® Professional Programming Required
In The Box	TRF-ZW10, DC Power Adapter, Mounting Plate, 4 Screws (for Mounting Plate)
UPC	656787-501010
Warranty	http://www.urc-automation.com/warranty

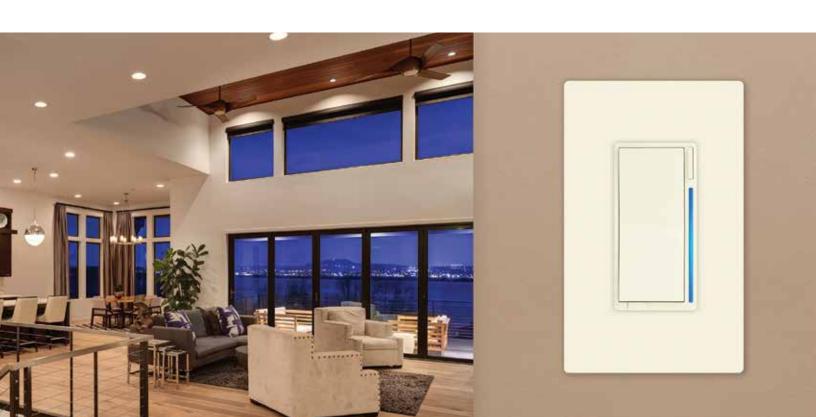



























over sources easy. URC's HDA via Total Control offers simple, intuitive design that makes user operation easy-to-learn."

- Jerry Lamm, KTL Audio Video, Inc.

High-Definition Audio (HDA)







HDA-8100 Multi-Zone Amplifier

With more zones and inputs, this powerful, flexible amplifier sets a new standard in high-definition audio. The HDA-8100 Multi-Zone Amplifier provides 100 Watts of power to 8 stereo amplified zone outputs or up to 16 single channel amplified mono zone outputs. Better yet, any zone can be set to stereo or two independent mono zones. It features 8 analog audio inputs with audio sensing and 1 coaxial digital input providing plenty of options. Able to store up to 10 .WAV files.



HDA-4100 Multi-Zone Amplifier

Perfect for smaller installations, the HDA-4100 Multi-Zone Amplifier delivers 100 Watts of power to 4 stereo channels or 8 single channel mono zones. Able to store up to 10 .WAV files.







HDA-1600-70V Low-Z/70 Volt Amplifier

Perfect for commercial applications, the HDA-1600 Low-Z/70 Volt Amplifier delivers 600 Watts of power per channel and features your choice of 1 balanced input or 2 microphone inputs. The two microphone inputs support phantom power and the amplifier supports ducking to automatically lower the volume of music playing for paging applications and microphone use. Can power one Low-Z and 70V channel at the same time. Able to store up to 10 .WAV files.





HDA-130 Single Zone Amplifier

Small but powerful (PoE+ or PoE++), the HDA-130 Single Zone Amplifier can be placed nearly anywhere and delivers 30W x 2 of power to local zone speakers. It can also stream up to two local sources throughout the HDA system to multiple zones and supports ducking to automatically lower the volume of music playing for paging applications and microphone use. Able to store up to 10 .WAV files.







HDA-I/O Stream Adapter

The HDA-I/O can be set in software to be used as an HDA Audio Stream Receiver or a Stream Injector. Small in size, this flexible piece can be placed nearly anywhere to deliver high resolution streaming audio from the TV or other non-rack mounted devices throughout your home or commercial environment, or feed audio out of the HDA system to an external amplifier or A/V receiver. Able to store up to 10 .WAV files.





HDA-SW5 Gigabit AVB Network Switch

The HDA-SW5 is a 5-Port Gigabit AVB Network Switch. Required for HDA systems with more than one HDA component, this network switch effortlessly manages and routes network traffic. Up to 7 switches can be installed in a system with no audible latency.





SKU	HDA-8100	HDA-4100
Description	Premier Multi-Zone High-Definition Audio Amp	Advanced Multi-Zone High-Definition Audio Amp
Zones	8 Stereo / 16 Mono Channel	4 Stereo / 8 Mono Channel
Watts @ 8Ω	100 Watts / Channel	100 Watts / Channel
Watts @ 4Ω	200 Watts / Channel	200 Watts / Channel
70 Volt Watts	N/A	N/A
Streaming	96 kHz / 24-bit	96 kHz / 24-bit
High & Low Pass Filters	Yes	Yes
5-band Parametric EQ	Yes	Yes
Downmixing	Dolby® and DTS® 5.1 Channel	N/A
Ducking/Paging	Yes	Yes
.WAV Files	Up to 10 Files	Up to 10 Files
Inputs	8 RCA Analog with Audio Sensing, 1 Coaxial Digital with Audio Sensing	4 RCA Analog with Audio Sensing
Outputs	8 Stereo / 16 Mono Channel, 2 Assignable Pre-Amp	4 Stereo / 8 Mono Channel, 2 Assignable Pre-Amp
Triggers	2 - 12 Volt that support 150mA of current	2 - 12 Volt that support 150mA of current
Ethernet RJ45	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)
Power	AC100-240V 50/60 Hz	AC100-240V 50/60 Hz
Dimensions	W: 17.125" / 434.98mm H: 3.875" / 98.425mm D: 11.94" / 303.2mm	W: 17.125" / 434.98mm H: 3.875" / 98.425mm D: 11.94" / 303.2mm
Weight	12.8 lbs / 5.6 kg	11.9 lbs / 5.39 kg
System	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.
In The Box	HDA-8100, US 3-Prong Power Cord, 8 Speaker Terminal Blocks, 4 Device Feet, 4 Feet Mounting Screws, Rack Ears, 6 Rack Ear Screws	HDA-4100, US 3-Prong Power Cord, 4 Speaker Terminal Blocks, 4 Device Feet, 4 Feet Mounting Screws, Rack Ears, 6 Rack Ear Screws
Sold Separately	*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed	*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed
UPC	656787-503007	656787-503014
Warranty	http://www.urc-automation.com/warranty	





SKU	HDA-1600-70V	HDA-130	
Description	Low-Z / 70 Volt High-Definition Audio Amp	Single Zone High-Definition Audio Amp	
Zones	1 Stereo or 2 Mono Channel	1 Stereo	
Watts @ 8Ω	600 Watts / Channel	30 Watts / Channel	
Watts @ 4Ω	1200 Watts / Channel	30 Watts / Channel	
70 Volt Watts	2 x 600 Watts / Channel	N/A	
Streaming	96 kHz / 24-bit	96 kHz / 24-bit	
High & Low Pass Filters	Yes	Yes	
5-band Parametric EQ	Yes	Yes	
Downmixing	N/A	N/A	
Ducking/Paging	Yes	Yes	
.WAV Files	Up to 10 Files	Up to 10 Files	
Inputs	4 Unbalanced Analog Audio Inputs, 1 Balanced Analog Audio Input, 2 Microphone Inputs with URC DSP Features (supporting Phantom Power)	1 RCA Analog, 1 Optical (TOSLINK) Digital (PCM)	
Outputs	1 Stereo Amplifier Output Channel / 2 Independent Mono Output Channels	1 Stereo, 1 Mono L+R Pre-Amp for Subwoofer	
Triggers	2 - 12 Volt that support 150mA of current	N/A	
Ethernet RJ45	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)	
Power	AC100-240V 50/60 Hz	AC100-240V 50/60 Hz, PoE Powered	
Dimensions	W: 17.125" / 434.98mm H: 3.875" / 98.425mm D: 11.94" / 303.2mm	W: 4.94" / 125.4mm H: 1.44" / 36.5mm D: 5" / 127mm	
Weight	12.25 lbs / 5.55 kg	0.75 lbs / 0.34 kg	
System	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.	
In The Box	HDA-1600, US 3-Prong Power Cord, 1 Speaker Terminal Block, 4 Device Feet, 4 Feet Mounting Screws, Rack Ears, 6 Rack Ear Screws, XLR to Terminal Block Input Adapter	HDA-130, 48 Volt DC Adapter; PoE+ or PoE++, 1 Speaker Terminal Block, 4 Device Feet, 4 Screws, 3.5mm to RCA Cable	
Sold Separately	*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed	*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed	
UPC	656787-503021	656787-503038	
Warranty	http://www.urc-automation.com/warranty		





SKU	HDA-I/O	HDA-SW5	
Description	Input / Output Stream Adapter 5-Port Gigabit AVB Network Swite		
Zones	When used as an Output device, 1 zone is available with High Pass/Low Pass filters, and a 5-band parametric	N/A	
Watts @ 8Ω	N/A	N/A	
Watts @ 4Ω	N/A	N/A	
70 Volt Watts	N/A	N/A	
Streaming	96 kHz / 24-bit	Yes	
High & Low Pass Filters	N/A	N/A	
5-band Parametric EQ	N/A	N/A	
Downmixing	Dolby® and DTS® 5.1 Channel	N/A	
Ducking/Paging	Yes	N/A	
.WAV Files	Up to 10 Files	N/A	
Inputs	1 RCA Analog, 1 Optical (TOSLINK) Digital (Dolby and DTS 5.1), 1 Coaxial Digital Input	4 Gigabit AVB Ports LAN 1000M Mbps	
Outputs	1 RCA Analog, 1 Optical (TOSLINK) Digital (PCM), 1 Coaxial Digital (PCM)	4 Gigabit AVB Ports LAN 1000M Mbps	
Triggers	1 - 12 Volt that support 150mA of current	N/A	
Ethernet RJ45	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)	Gigabit Ethernet Connection (Full Duplex, for Gigabit LAN only)	
Power	12V DC 0.9A (supplied adapter), PoE Powered	12V DC 0.9A (supplied adapter)	
Dimensions	W: 4.94" / 125.4mm H: 1.44" / 36.5mm D: 5" / 127mm	W: 4.94" / 125.4mm H: 1.44" / 36.5mm D: 5" / 127mm	
Weight	0.65 lbs / 0.29 kg	0.55 lbs / 0.24 kg	
System	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.	HDA requires Total Control® Accelerator 3 to program and deploy. Professional Programming Required.	
In The Box	HDA-I/O, 12 Volt DC Adapter; PoE+ or PoE++, US, UK, Euro Plug Adapter, Left/Right L Brackets, 4 L Bracket Screws, 4 Rubber Feet	HDA-SW5, 12 Volt DC Adapter, US, UK, Euro Plug Adapter, Left/Right L Brackets, 4 L Bracket Screws, 4 Rubber Feet	
Sold Separately	*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed	N/A	
UPC	656787-503045	656787-503052	
Warranty	http://www.urc-automation.com/warranty		



URC's High-Definition Audio (HDA) delivers a high fidelity audio solution offering uncompromising quality and studio sound to your home. Combining HDA smart amplifiers, speakers and Total Control software creates a concert experience in your home or office.





"PWCampbell is extremely happy with our partnership with URC. Utilizing the Total Control platform in commercial installations, we can quickly program and deploy systems to meet our clients' most complex needs. The technical support is responsive and quick to help our team develop solutions that matter. URC is a true enterprise-grade solution and partner."

- Ben Mahtani, PWCampbell

Architectural Speakers

URC offers a range of high quality in-ceiling and outdoor speakers. Professionally tuned to provide great sound, these speakers are four times more efficient to install. With our revolutionary secure clamping system and easy wire connectivity, they are true tool-less architectural speakers. Simply connect the speaker wire to the removable terminals, install the speaker into the cut out and push down on the levers to engage the clamps to the drywall to lock the speaker in place.



8" High Performance Two-Way In-Ceiling Speakers



6.5" High Performance Two-Way In-Ceiling Speakers



6.5" Two-Way Outdoor Speakers (Black)



6.5" Two-Way In-Ceiling Speakers



6.5" Two-Way Dual Voice Coil In-Ceiling Speakers



6.5" Two-Way Outdoor Speakers (White)



Removable speaker wire terminal.



Unique, patented clamp system allows for easy installation and removal.







SKU	SP-8EX	SP-6EX	SP-6LE
Description	8" High Performance Two- Way In-Ceiling Speakers	6.5" High Performance Two- Way In-Ceiling Speakers	6.5" Two-Way In-Ceiling Speakers
Woofer	8" woven fiber cone woofer	6.5" woven fiber cone woofer	6.5" polypropylene woofer
Tweeter	1" aluminum dome swivel tweeter	1" aluminum dome swivel tweeter	1" silk dome swivel tweeter
Power Handling	5-135 watts	5-135 watts	5-100 watts
Nominal Impedance	8 ohms	8 ohms	8 ohms
Frequency Response	42-20 kHz	42-20 kHz	50-20 kHz
Sensitivity	92 dB	92 dB	91 dB
EQ Adjustments	-3 dB, 0 dB, +3 dB (tweeter and woofer)	-3 dB, 0 dB, +3 dB (tweeter and woofer)	-3 dB, 0 dB, +3 dB (tweeter and woofer)
Grill Type	Micromesh, frame-less, magnetic, steel grill	Micromesh, frame-less, magnetic, steel grill	Micromesh, frame-less, magnetic, steel grill
Finished Dimensions	10.82" Diameter (275mm) 4.69" Depth (119mm)	9.45" (240mm) Diameter 3.98" (101mm) Depth	9.45" (240mm) Diameter 3.98" (101mm) Depth
Cutout Dimensions	9.57" / 243mm	8.15" / 207mm	8.15" / 207mm
Ceiling Thickness	0.5" min – 1.0" max	0.5" min – 1.0" max	0.5" min – 1.0" max
Weight	5.4 lbs / 2.45 kg each	4 lbs / 1.81 kg each	4 lbs / 1.81 kg each
System	Total Control®, Professional Programming Required	Total Control®, Professional Programming Required	Total Control®, Professional Programming Required
In The Box	2x SP-8EX In-Ceiling Speakers, Cutout Template	2x SP-6EX In-Ceiling Speakers, Cutout Template	2x SP-6LE In-Ceiling Speakers, Cutout Template
UPC	656787-600065	656787-600034	656787-600027
Warranty	http://www.urc-automation.com/warranty		







SKU	SP-DV6	SP-OD6-BL	SP-OD6-WH
Description	6.5" Two-Way Dual Voice Coil In-Ceiling Speaker	6.5" Two-Way Outdoor Speakers (Black)	6.5" Two-Way Outdoor Speakers (White)
Woofer	6.5" polypropylene woofer	6.5" polypropylene woofer	6.5" polypropylene woofer
Tweeter	Dual 3/4" silk dome swivel tweeters	Dual 3/4" silk dome swivel tweeters	Dual 3/4" silk dome swivel tweeters
Power Handling	5-100 watts	5-100 watts	5-100 watts
Nominal Impedance	4 ohms or 8 ohms selectable	8 ohms	8 ohms
Frequency Response	42-20 kHz	50-20 kHz	50-20 kHz
Sensitivity	92 dB	91 dB	91 dB
EQ Adjustments	-3 dB, 0 dB, +3 dB (tweeter and woofer)	N/A	N/A
Grill Type	Micromesh, frame-less, magnetic, steel grill	Micromesh, Aluminum	Micromesh, Aluminum
Finished Dimensions	9.45" (240mm) Diameter 3.98" (101mm) Depth	W: 8.58" / 218mm H: 13.38" / 340mm D: 8.62" / 219mm	W: 8.58" / 218mm H: 13.38" / 340mm D: 8.62" / 219mm
Cutout Dimensions	8.15" / 207mm	N/A	N/A
Ceiling Thickness	0.5" min – 1.0" max	N/A	N/A
Weight	4.4 lbs / 2 kg each	5.6 lbs / 2.54 kg	5.6 lbs / 2.54 kg
System	Total Control®, Professional Programming Required	Total Control®, Professional Programming Required	Total Control®, Professional Programming Required
In The Box	1x SP-DV6 In-Ceiling Speakers	2x SP-OD6-BL Outdoor Speakers, 2 x "U" Shaped Mounting Brackets	2x SP-OD6-WH Outdoor Speakers, 2 x "U" Shaped Mounting Brackets
UPC	656787-600010	656787-600096	656787-600102
Warranty	http://www.urc-automation.com/warranty		



"Using a virtual smart home environment is a great idea to inform end-users on the benefits of URC's Total Control automation and control system. We plan to stream on our showroom iPads and share with our clients."

- Ryan Rumer, World Wide Stereo Sales

Mobile App




URC Mobile

The URC Mobile app for iOS and Android devices provides convenient system control while at home or away. Free, unlimited mobile app use is included with the system. Mobile apps feature the same powerful menus that users enjoy on their Total Control user interfaces.





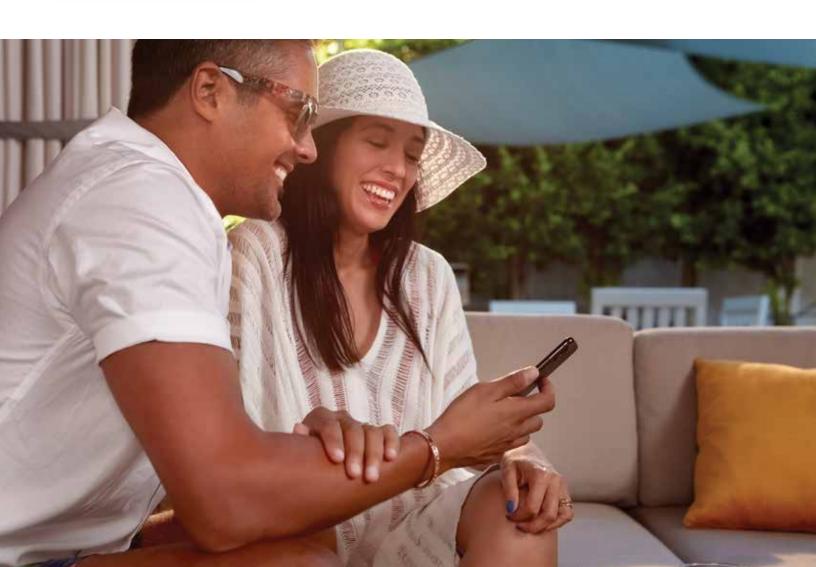


Sensors



3.5mm Sensors

URC offers a family of 3.5mm sensors to enhance automation, support power management and enable integration of legacy devices. They feature status indicator LEDs and sensitivity adjustment, and are capable of extending up to 120 feet.

SKUs	Audio: SEN-AUD, Contact Closure: SEN-CCLS, Current: SEN-CMF, Light: SEN-LITE Video: SEN-VID, Voltage: SEN-VOLT
Description	3.5mm Sensors
Ports	Analog Connection
Buttons	N/A
LEDs	Status
Network Connection Ethernet	N/A
Power	3.5mm Plug
Dimensions	W: 3" / 76.2mm H: 6" / 150mm D: 1" / 25.4mm
Weight	3 oz / 0.09 kg
System	Total Control® Professional Programming Required
In The Box	Sensor, 3.5mm Plug
UPC	SEN-AUD: 656787-330436 SEN-CCLS: 656787-330429 SEN-CMF: 656787-330443 SEN-LITE: 656787-330450 SEN-VID: 656787-330412 SEN-VOLT: 656787-330405
Warranty	http://www.urc-automation.com/warranty

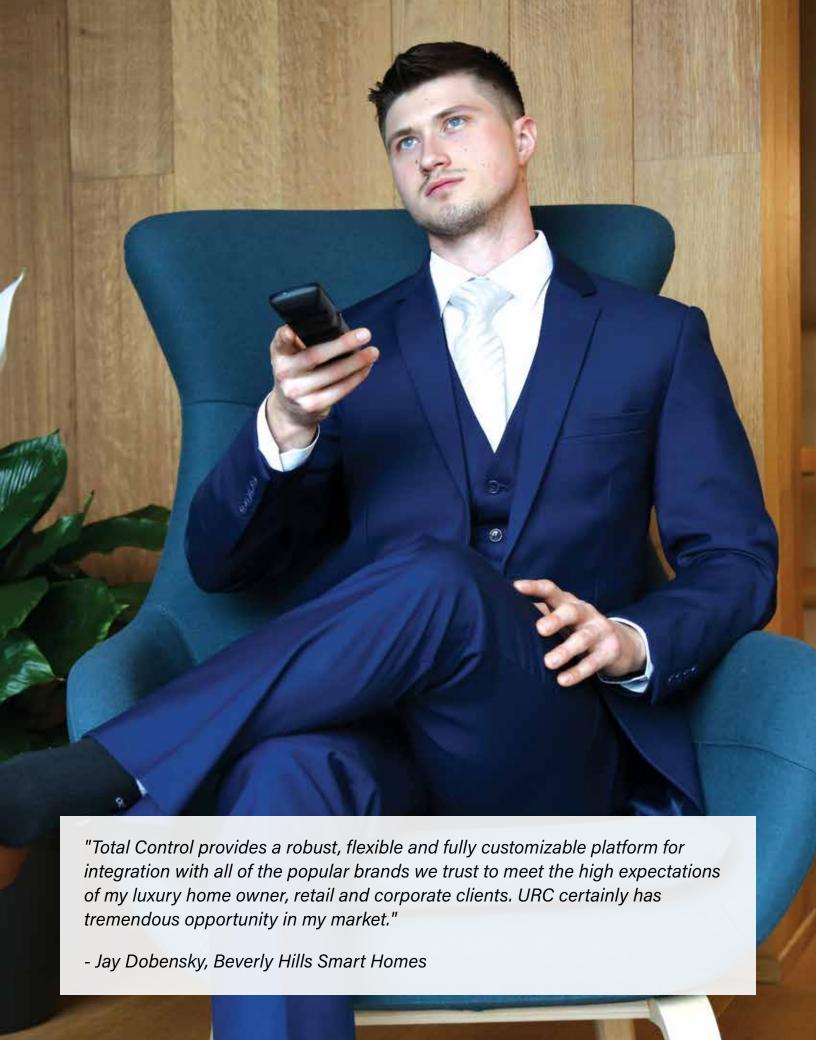



Best-in-Class Integration Partnerships

Total Control integrates with thousands of entertainment and smart home products, including two-way control of many devices.

Over the past 30 years, URC has built the largest library of control codes in the industry. Strong relationships with top consumer electronics, subscription broadcast, network and software companies assure the ongoing evolution of the Total Control ecosystem.



And many more



URC Offers Industry-Leading Dealer Resources

URC offers best-in-class, award-winning dealer training including comprehensive courses. Frequently updated webinars and 24/7 self-paced tutorials allow you to continue your education.

A convenient, intuitive dealer-exclusive portal provides access to ordering/ e-commerce, training courses, downloads, technical resources, dealer programs and marketing materials.

Join URC's Elite Dealer Community

★ totalcontrol@urc-automation.com

Dealer Portal Registration

www.urcportal.com/home/register

Dealer Training Registration

www.urcportal.com/training

Technical Support

914-835-4484

Public Website

www.urc-automation.com



Over a decade of best-in-class awards!

Programming Software



Accelerator

Accelerator is URC's comprehensive software for programming Total Control products, incorporating intuitive features and control to simplify the lives of your customers. With customizable graphics, your clients can truly enjoy using their system and controlling audio/video and smart devices throughout their home or business.

Accelerator's quick programming is based on the auto creation of system macros and activities that can literally save hours (or days) of programming effort and logic while still providing the best user experience possible!



TC Flex


For those who want ultimate flexibility to create custom layouts, URC's TC Flex software is a powerful tool that enables you to truly create the exact design and layout your customers desire. TC Flex adds the ability to FULLY customize everything on the graphical user interface for commercial and large residential projects.

URC's Total Control is Fast and Easy to Program

URC offers two intuitive, easy to install versions of Total Control - Accelerator and TC Flex programming platforms. Both versions are compatible across URC base stations, controllers and mobile devices (iOS and Android).

- Accelerator provides quick, template-based design and graphic customization
- TC Flex offers unlimited possibilities with totally customizable, free-form user interface design on an open canvas and floor plan overview

	Accelerator	TC Flex
Offsite Programming	②	
Customized Driver Creation		
Device Icon Customization	⊘	
Wallpaper Customization	Ø	Ø
Customized Macro Programming	⊘	Ø
Main Menu Layout Customization	Grid (XL Icons or Standard) & Ribbon	
Automatic Macro Generation with Customization	⊘	Customizable
Automatic Layout Template		Customizable
Faster Programming	⊘	Customizable
Freeform UI Customization	Partial	

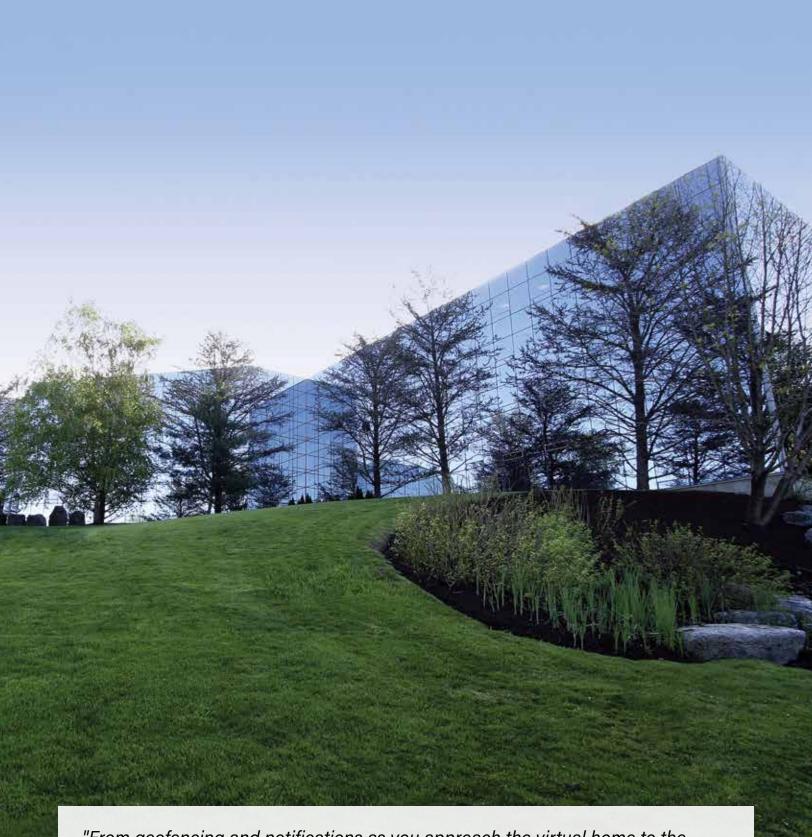

"From geofencing and notifications as you approach the virtual home to the party on the patio, URC created a winning digital tool to help our clients dream big. It's control and automation on a new level."

- Lowell Kaps, Lowell/Edwards Home Integration, Inc.

About URC

Headquartered in Harrison NY, URC is a global leader in automation and control systems for residential and commercial applications. URC technology is respected worldwide for unsurpassed performance and reliability with over 100 million remote controls sold in the past ten years alone.

Established in 1991, URC entered the control market with handheld remotes for subscription broadcast providers and consumer electronics companies.

In 1994, URC launched the legendary MX-series remote control line for home theaters. It continues to be popular today. The line revolutionized the way that people controlled their home theaters, A/V systems and subscription broadcast technology.

Total Control, introduced in 2011, builds on this rich legacy to deliver whole-home automation and control for the premium segment. Total Control systems are custom designed and installed by select URC systems integrators.

Introduced in 2017, the highly-acclaimed Total Control 2.0 system features flawless product quality, amazing graphic customization, upgraded programming options, and more.

Continuing on a history of innovation, URC launched its third generation operating system/programming platform in 2020. Built on the highly popular Total Control system, Accelerator 3 makes it even easier and faster to program.

Learn more at www.urc-automation.com.



www.urc-automation.com













